

GB-025 4x4 cedar raised garden bed

01 / OVERALL GEOMETRY | G1 | INCHES | NOT TO SCALE


TOP / X-Y DATUM

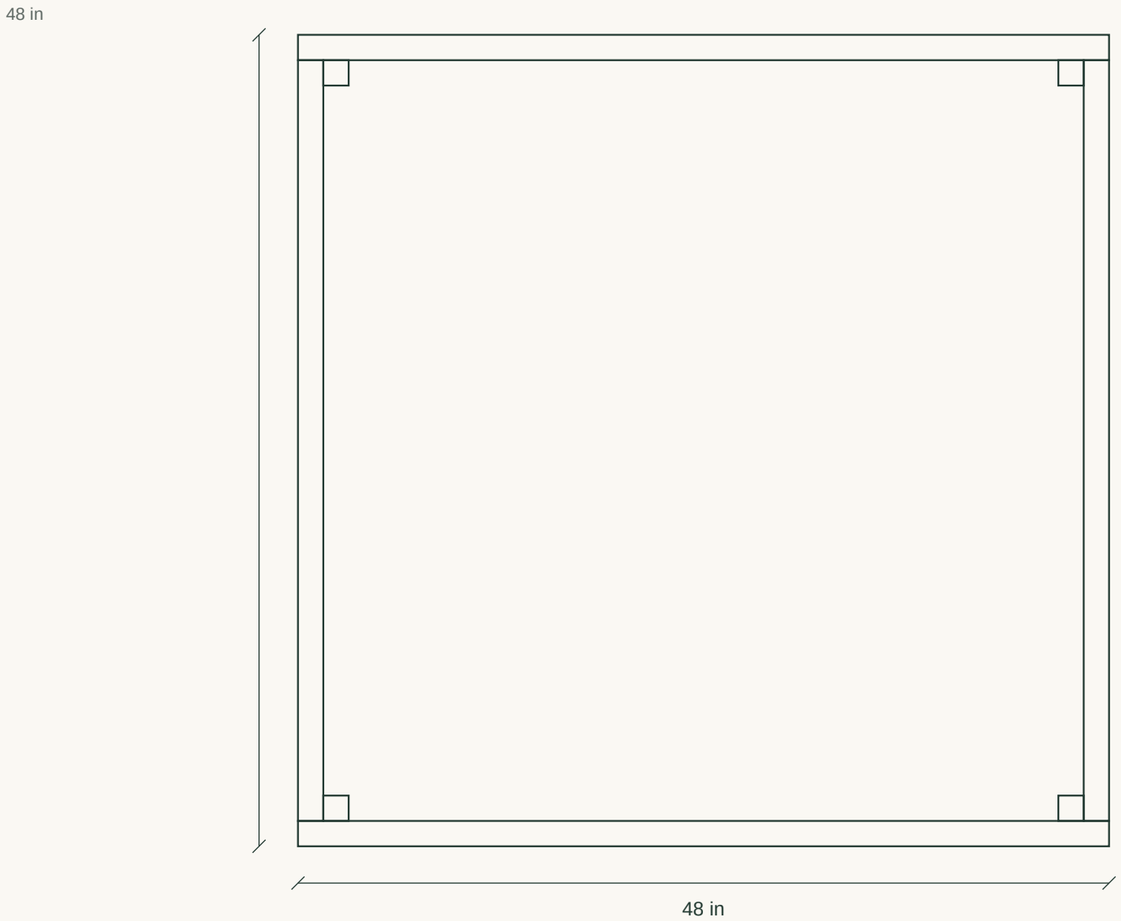

FRONT / X-Z

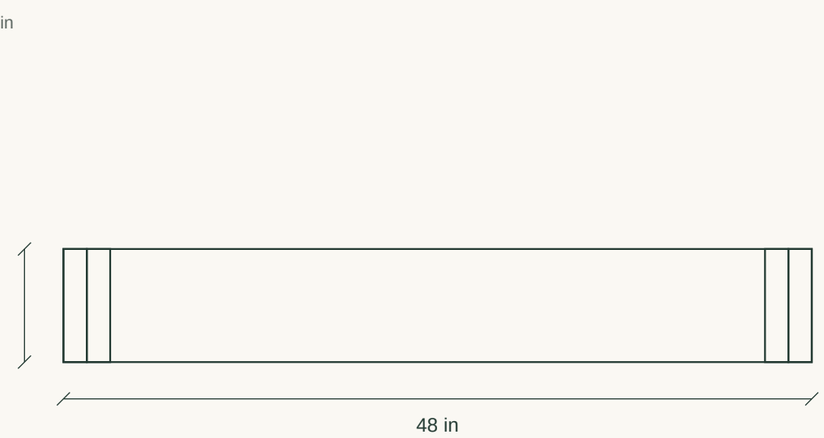

SIDE / Y-Z

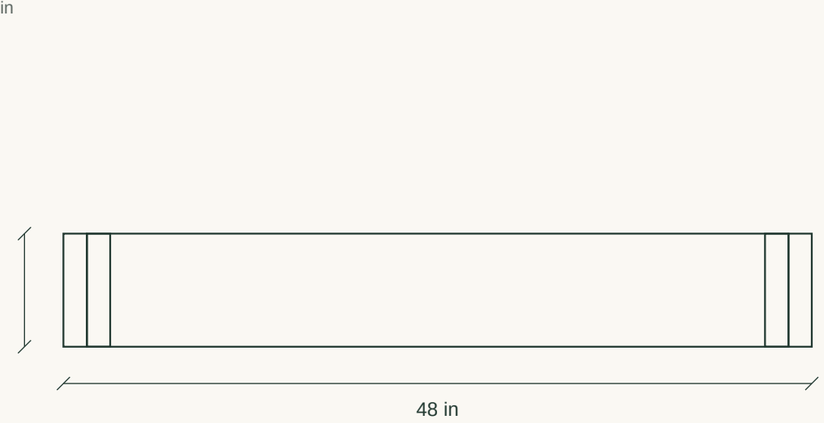

READ THE DIMENSIONS, NOT THE DISPLAY SCALE

Views are original wireframe projections. Hidden edges may remain visible; schematic lines are not cutting paths. Stock is actual-size reference geometry, not a nominal lumber label.

No load capacity, field performance or code compliance is established by these drawings. Read the project-specific limits in the guide.

SPECIFICATION

Revision: G1

Model units: inches

Drawing scale: not to scale

Publication: released 2026-10-11

GB-025 4x4 cedar raised garden bed

02 / PARTS AND CRITICAL DETAILS | G1 | INCHES | NOT TO SCALE

PART / CUT SCHEDULE

PART	QTY	FINISHED SIZE (IN)	STOCK / MATERIAL
L	2	48 x 7.25 x 1.5	surfaced untreated cedar 2x8
E	2	45 x 7.25 x 1.5	surfaced untreated cedar 2x8
C	4	7.25 x 1.5 x 1.5	surfaced untreated cedar 2x2


FASTENER / HARDWARE SCHEDULE

F1 | Qty 16 | proposed #8 x 2-1/2 stainless outdoor wood screw; buy at least 20


FIT AND CONNECTION NOTES

1. Canonical existing guide 25: 48 x 48 x 7.25 inches, surfaced untreated cedar.
2. Long walls run through; 45-inch end walls fit between them.
3. Long-wall screw lines 2.25 from ends; heights 1.5 and 5.75 above bottom.
4. End-wall screw lines 0.75 from ends; heights 2.25 and 5 above bottom.
5. Four 7.25-inch blocks; 16 proposed screws. Site CAD bundle remains unchanged.

PARTIAL LONG-WALL END / CANONICAL PATTERN

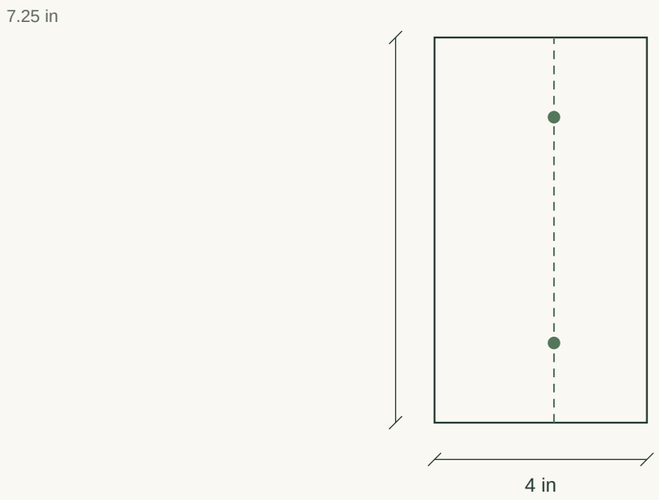

PARTIAL END-WALL FACE / CANONICAL PATTERN

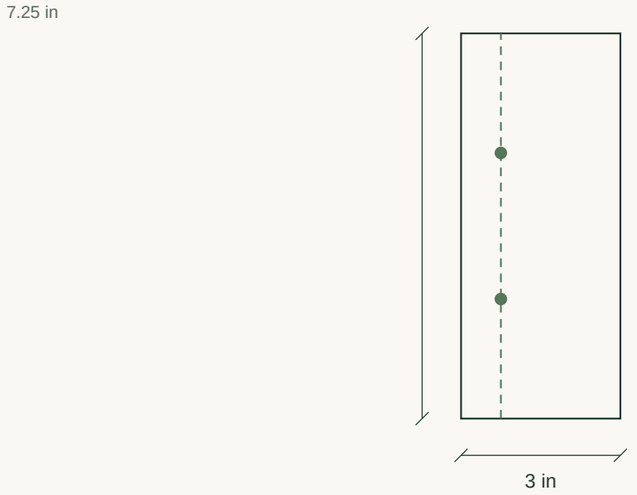

Green dots are screw or center locations, not head-size or strength claims. Consult the exact part datum and pilot instructions in the guide.

GB-025 4x4 cedar raised garden bed


03 / ASSEMBLY STUDIES AND INSPECTION | G1 | INCHES | NOT TO SCALE

01



Lay out the eight canonical cedar parts


02

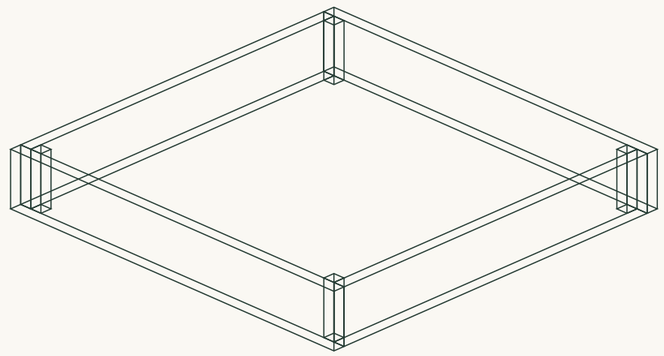

Clamp the square frame and four corner blocks

03

Canonical screw positions / partial faces

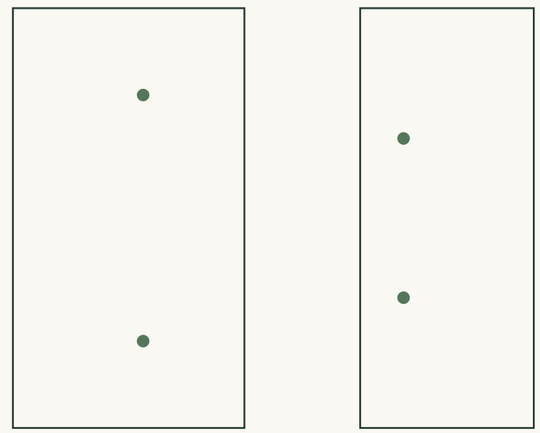

Inspect the existing staggered screw pattern

ORIGINAL SCHEMATIC ASSEMBLY VIEWS - NOT REAL-WORK PHOTOGRAPHS

These studies explain part relationships only. They omit clamps, operators and some fasteners; a floating intermediate assembly is not an instruction to work without support. Use the numbered guide steps for safe workholding, pilots, assembly order and stop conditions.

BEFORE THE NEXT STEP

Canonical existing guide 25: 48 x 48 x 7.25 inches, surfaced untreated cedar. Long walls run through; 45-inch end walls fit between them. Long-wall screw lines 2.25 from ends; heights 1.5 and 5.75 above bottom. End-wall screw lines 0.75 from ends; heights 2.25 and 5 above bottom. Four 7.25-inch blocks; 16 proposed screws. Site CAD bundle remains unchanged. Inspect the first actual joint or cut before repeating it. Recheck the drawings before cutting if you change any dimension.

Released without a prototype build: no physical trial, load test or supplier price check has been made.