

GB-061 Slatted compost bin

01 / OVERALL GEOMETRY | G1 | INCHES | NOT TO SCALE


TOP / X-Y DATUM

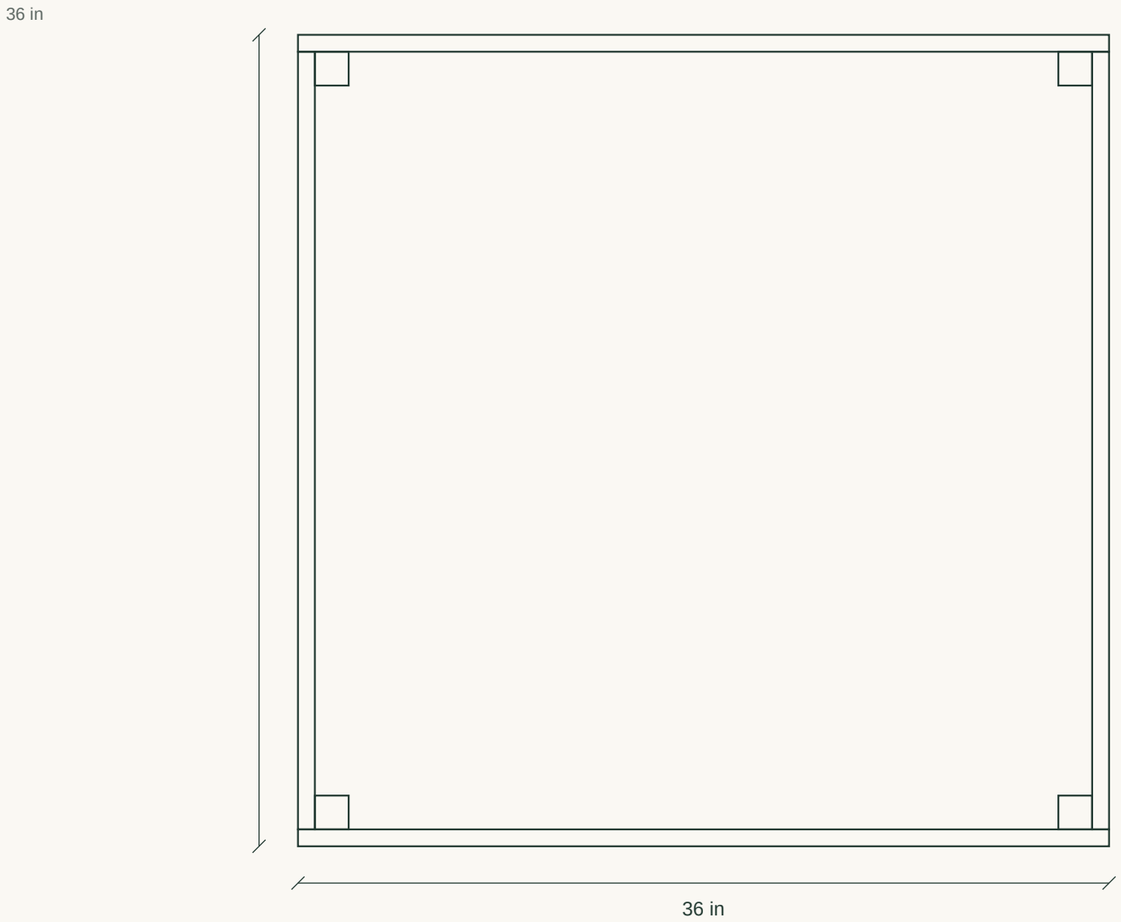

FRONT / X-Z

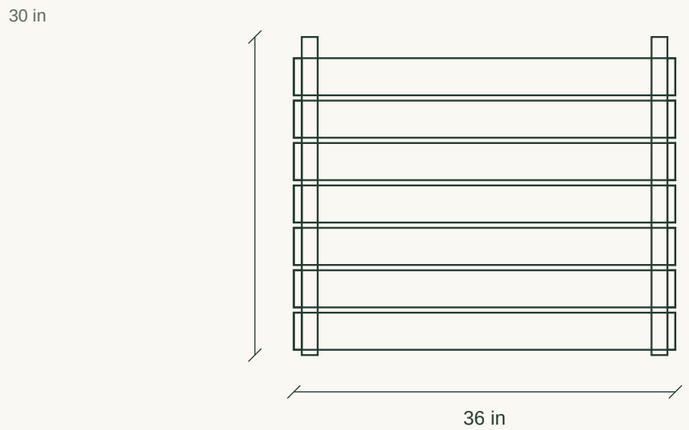

SIDE / Y-Z

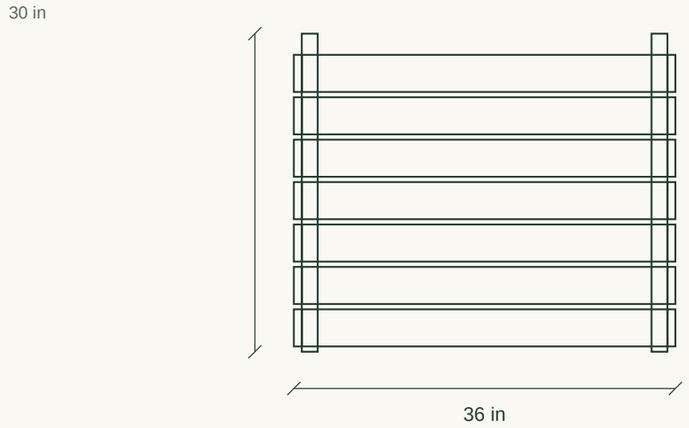

READ THE DIMENSIONS, NOT THE DISPLAY SCALE

Views are original wireframe projections. Hidden edges may remain visible; schematic lines are not cutting paths. Stock is actual-size reference geometry, not a nominal lumber label.

No load capacity, field performance or code compliance is established by these drawings. Read the project-specific limits in the guide.

SPECIFICATION

Revision: G1

Model units: inches

Drawing scale: not to scale

Publication: released 2026-10-11

GB-061 Slatted compost bin

02 / PARTS AND CRITICAL DETAILS | G1 | INCHES | NOT TO SCALE

PART / CUT SCHEDULE

PART	QTY	FINISHED SIZE (IN)	STOCK / MATERIAL
P	4	30 x 1.5 x 1.5	2x2
S	14	34.5 x 3.5 x 0.75	1x4
B	7	36 x 3.5 x 0.75	1x4
F	7	36 x 3.5 x 0.75	1x4


FASTENER / HARDWARE SCHEDULE

F1 | Qty 112 | #8 x 1-1/2 Type 316 stainless flat-head wood screw


FIT AND CONNECTION NOTES

1. Seven slats per face. Bottoms: 0.5 + 4n, n=0..6.
2. Side screw lines: 0.75 from ends; heights 0.5 and 3 from slat bottom.
3. Front/back lines: 1.5 from ends; heights 1 and 2.5 from slat bottom.
4. Back and front run through; side pieces fit between their outside planes.
5. Lower contents before removing each front slat. No food-waste exclusion claim.

PARTIAL SIDE-SLAT END / ONE POST

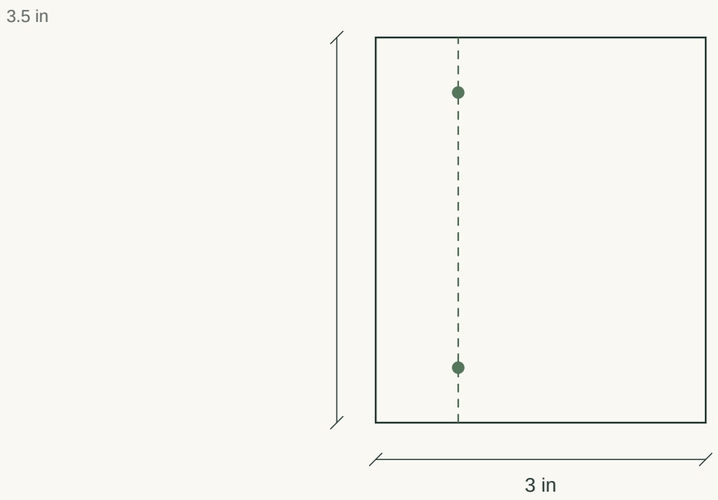

PARTIAL FRONT/BACK END / STAGGERED SCREWS

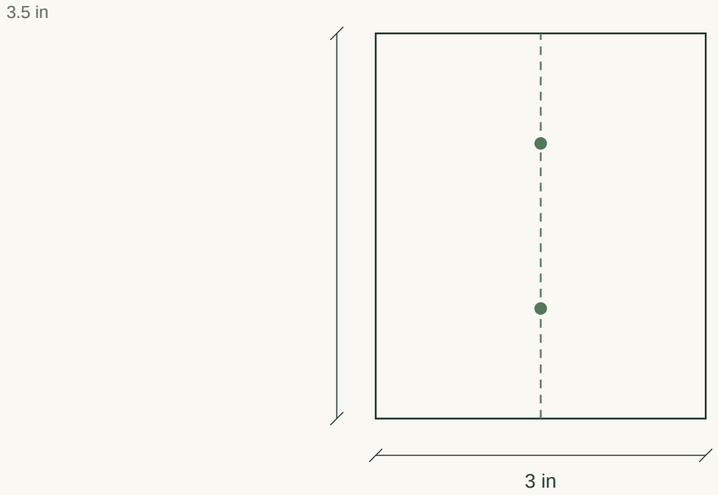


Green dots are screw or center locations, not head-size or strength claims. Consult the exact part datum and pilot instructions in the guide.

GB-061 Slatted compost bin


03 / ASSEMBLY STUDIES AND INSPECTION | G1 | INCHES | NOT TO SCALE

01

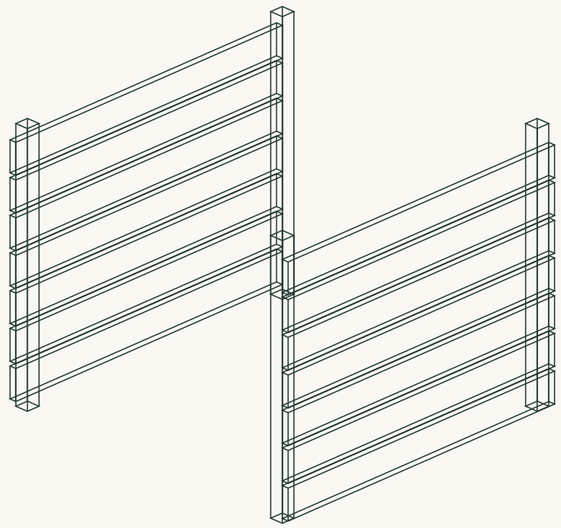


Build two matching side panels

02

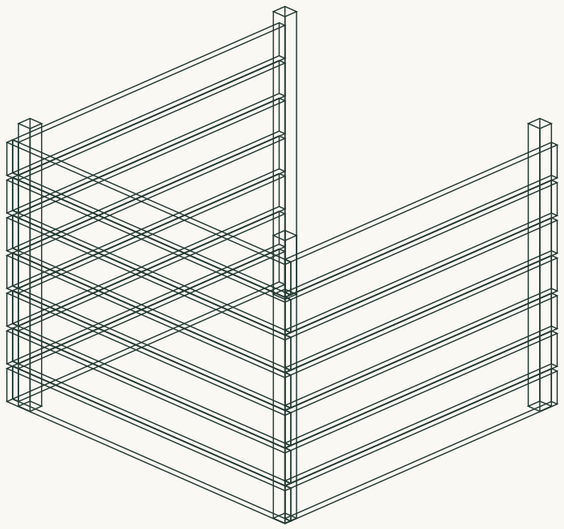

Join them with seven back slats

03

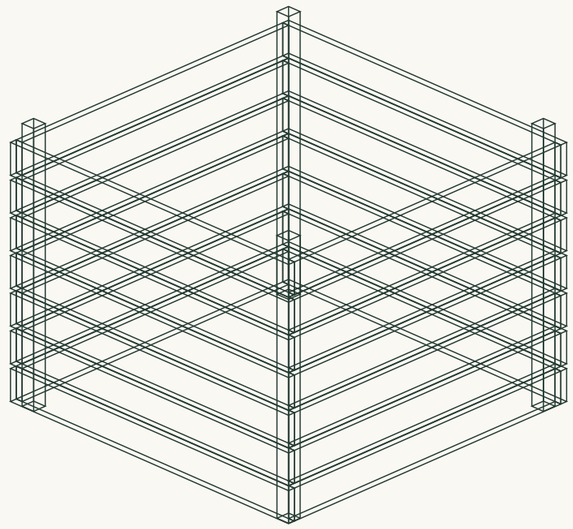

Fit seven removable front slats

ORIGINAL SCHEMATIC ASSEMBLY VIEWS - NOT REAL-WORK PHOTOGRAPHS

These studies explain part relationships only. They omit clamps, operators and some fasteners; a floating intermediate assembly is not an instruction to work without support. Use the numbered guide steps for safe workholding, pilots, assembly order and stop conditions.

BEFORE THE NEXT STEP

Seven slats per face. Bottoms: 0.5 + 4n, n=0..6. Side screw lines: 0.75 from ends; heights 0.5 and 3 from slat bottom. Front/back lines: 1.5 from ends; heights 1 and 2.5 from slat bottom. Back and front run through; side pieces fit between their outside planes. Lower contents before removing each front slat. No food-waste exclusion claim. Inspect the first actual joint or cut before repeating it. Recheck the drawings before cutting if you change any dimension.

Released without a prototype build: no physical trial, load test or supplier price check has been made.