

GB-068 Lined soil-mixing tray

01 / OVERALL GEOMETRY | G1 | INCHES | NOT TO SCALE


TOP / X-Y DATUM

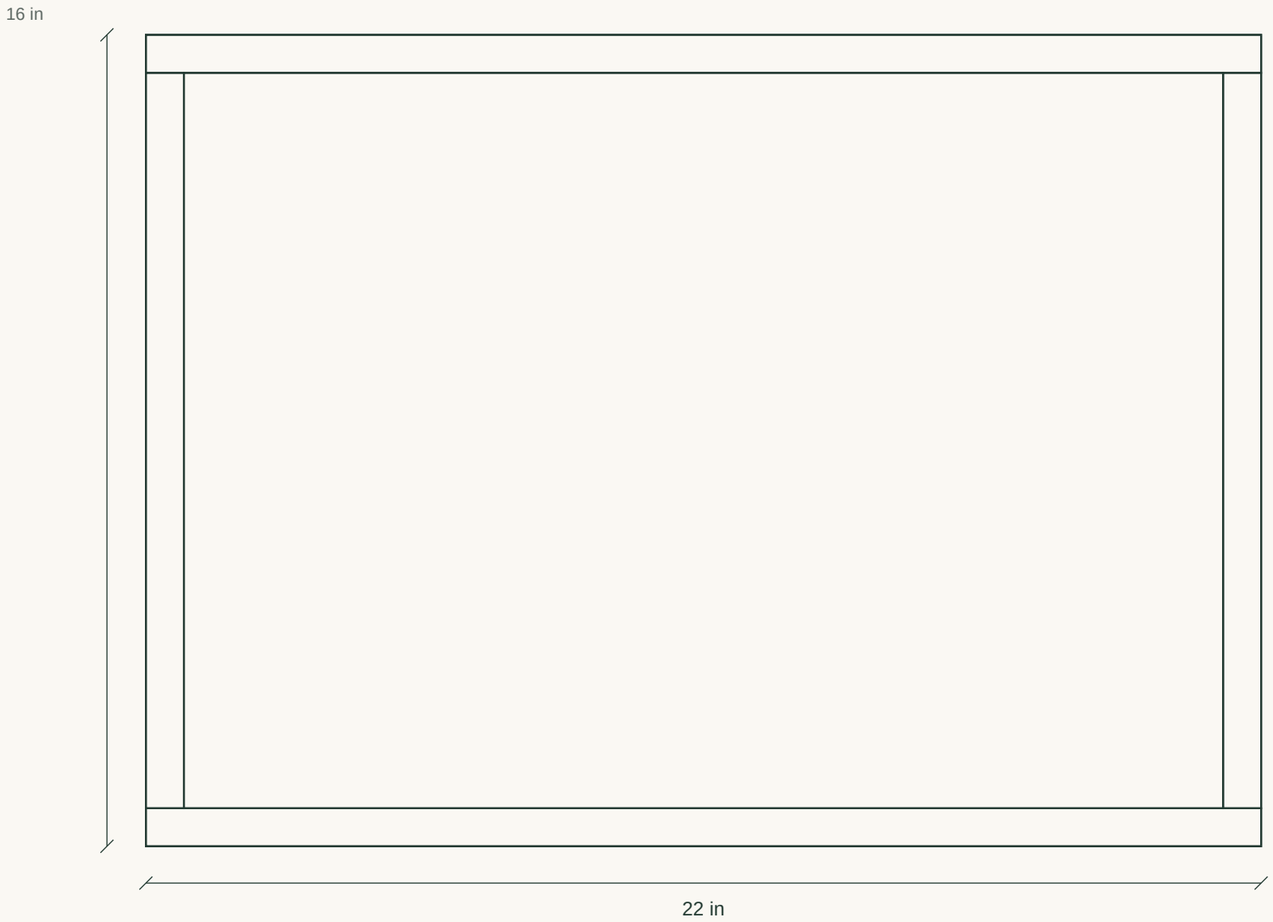

FRONT / X-Z

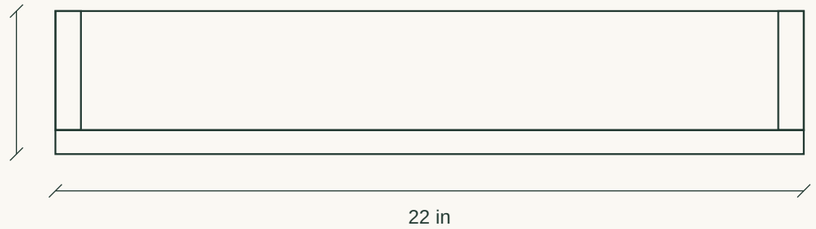

SIDE / Y-Z

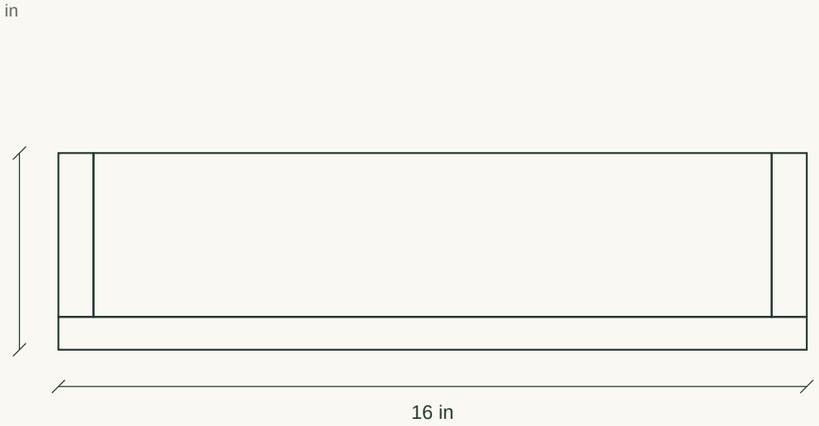

READ THE DIMENSIONS, NOT THE DISPLAY SCALE

Views are original wireframe projections. Hidden edges may remain visible; schematic lines are not cutting paths. Stock is actual-size reference geometry, not a nominal lumber label.

No load capacity, field performance or code compliance is established by these drawings. Read the project-specific limits in the guide.

SPECIFICATION

Revision: G1

Model units: inches

Drawing scale: not to scale

Publication: released 2026-10-11

GB-068 Lined soil-mixing tray

02 / PARTS AND CRITICAL DETAILS | G1 | INCHES | NOT TO SCALE

PART / CUT SCHEDULE

PART	QTY	FINISHED SIZE (IN)	STOCK / MATERIAL
B	1	22 x 16 x 0.703	Exterior B-C plywood, measured thickness
L	2	22 x 3.5 x 0.75	1x4
E	2	14.5 x 3.5 x 0.75	1x4
P	1	30 x 24 x 0.006	clean polyethylene liner

FASTENER / HARDWARE SCHEDULE


F1 | Qty 24 | #8 x 1-1/2 Type 316 stainless flat-head wood screw; 8 corners + 16 floor

C | Qty 8 | removable padded spring clip


FIT AND CONNECTION NOTES

1. Long walls run through; 14.5-inch ends fit between them.
2. Corner screws: 0.375 from ends; heights 1 and 2.5 above wall bottom.
3. Floor: six screws under each long wall, two under each end; 16 total.
4. Liner floor 20.5 x 14.5, centered in 30 x 24; fold, do not slit corners.
5. Fully supported use only. No liquid-retention or filled-lifting rating.

LINER / FOLD, DO NOT SLIT CORNERS

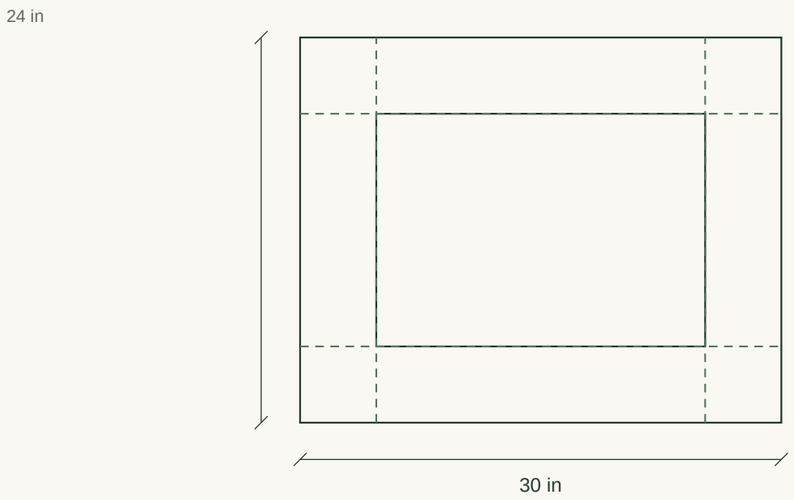

FLOOR / 16 UPWARD SCREW LOCATIONS

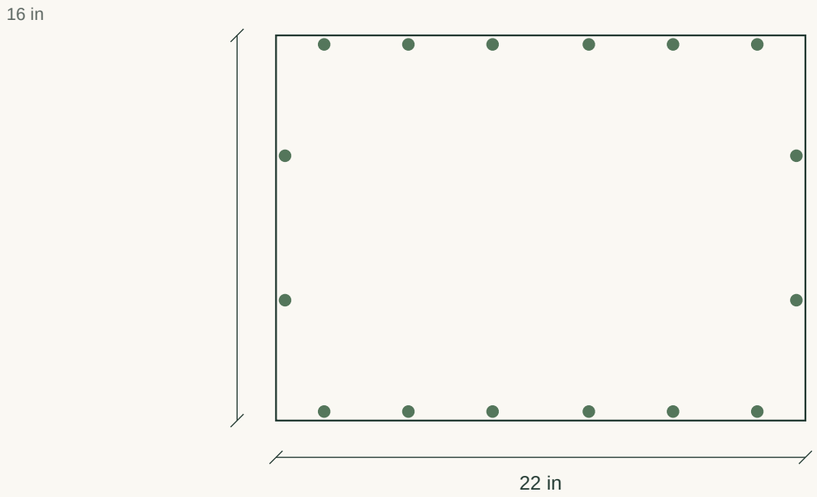


Green dots are screw or center locations, not head-size or strength claims. Consult the exact part datum and pilot instructions in the guide.

GB-068 Lined soil-mixing tray


03 / ASSEMBLY STUDIES AND INSPECTION | G1 | INCHES | NOT TO SCALE

01

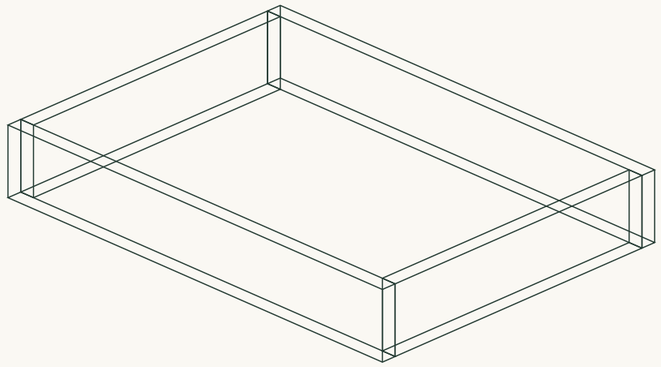


Square the four-wall ring

02

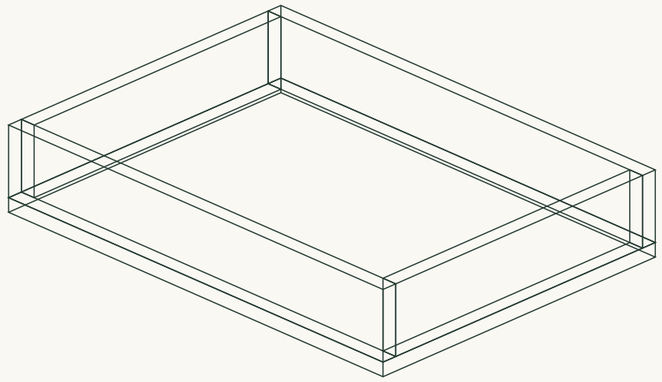

Attach the floor from underneath

03

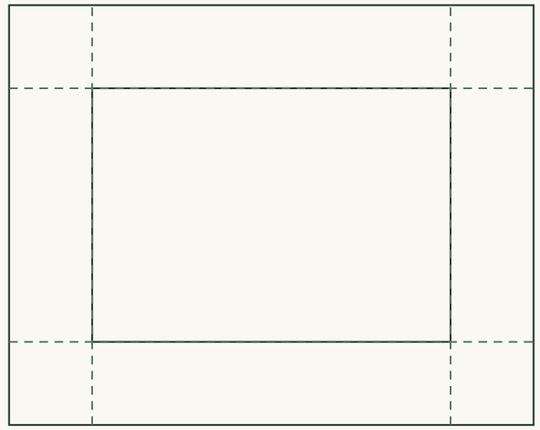

Fold the liner and fit eight removable clips

ORIGINAL SCHEMATIC ASSEMBLY VIEWS - NOT REAL-WORK PHOTOGRAPHS

These studies explain part relationships only. They omit clamps, operators and some fasteners; a floating intermediate assembly is not an instruction to work without support. Use the numbered guide steps for safe workholding, pilots, assembly order and stop conditions.

BEFORE THE NEXT STEP

Long walls run through; 14.5-inch ends fit between them. Corner screws: 0.375 from ends; heights 1 and 2.5 above wall bottom. Floor: six screws under each long wall, two under each end; 16 total. Liner floor 20.5 x 14.5, centered in 30 x 24; fold, do not slit corners. Fully supported use only. No liquid-retention or filled-lifting rating. Inspect the first actual joint or cut before repeating it. Recheck the drawings before cutting if you change any dimension.

Released without a prototype build: no physical trial, load test or supplier price check has been made.