

GB-087 Seed-packet organizer

01 / OVERALL GEOMETRY | G1 | INCHES | NOT TO SCALE


TOP / X-Y DATUM

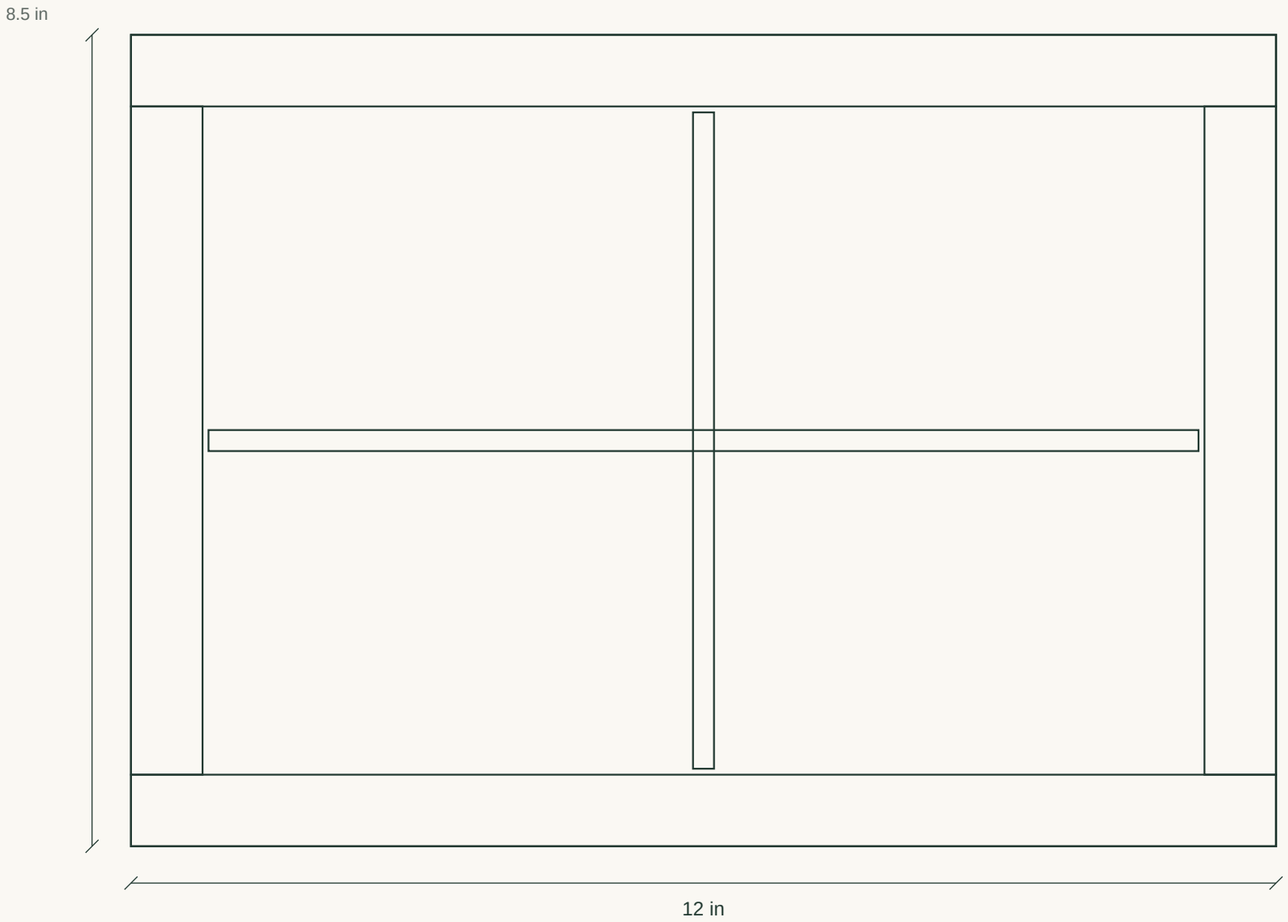

FRONT / X-Z

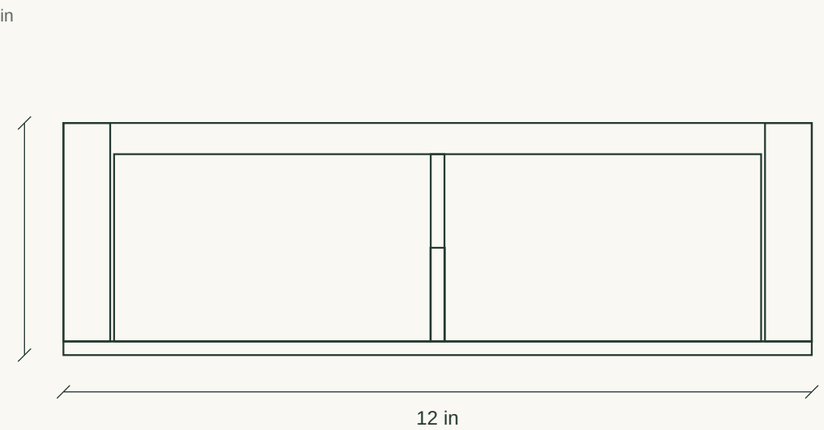

SIDE / Y-Z

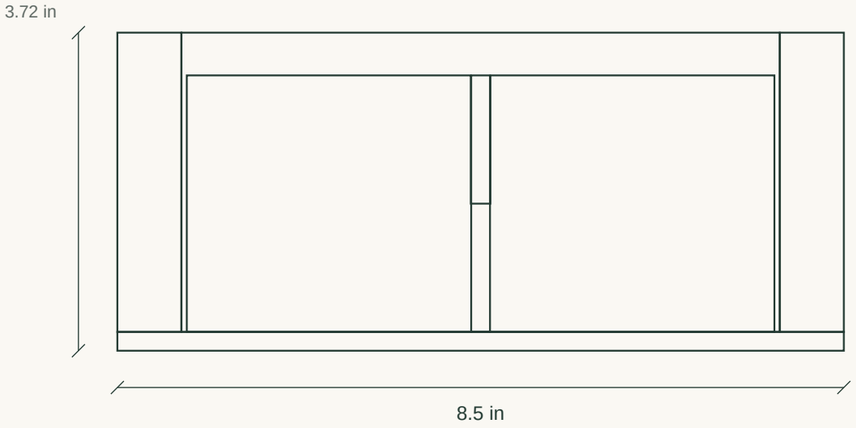

READ THE DIMENSIONS, NOT THE DISPLAY SCALE

Views are original wireframe projections. Hidden edges may remain visible; schematic lines are not cutting paths. Stock is actual-size reference geometry, not a nominal lumber label.

No load capacity, field performance or code compliance is established by these drawings. Read the project-specific limits in the guide.

SPECIFICATION

Revision: G1

Model units: inches

Drawing scale: not to scale

Publication: released 2026-10-11

GB-087 Seed-packet organizer

02 / PARTS AND CRITICAL DETAILS | G1 | INCHES | NOT TO SCALE

PART / CUT SCHEDULE

PART	QTY	FINISHED SIZE (IN)	STOCK / MATERIAL
L	2	12 x 3.5 x 0.75	1x4
E	2	7 x 3.5 x 0.75	1x4
B	1	12 x 8.5 x 0.22	sanded plywood; measured thickness
D1	1	10.375 x 3 x 0.22	same plywood; slot from bottom
D2	1	6.875 x 3 x 0.22	same plywood; slot from top

FASTENER / HARDWARE SCHEDULE


F1 | Qty 8 | #6 x 1-1/2 stainless flat-head wood screw; wall corners

F2 | Qty 12 | #6 x 3/4 stainless flat-head wood screw; floor


FIT AND CONNECTION NOTES

1. Ends fit between 12-inch long walls; clear opening 10.5 x 7.
2. D1 slot from bottom; D2 slot from top; both 1.5 deep.
3. Slot centers 5.1875 and 3.4375; width 0.23 for measured 0.22 panel.
4. 8 long corner screws and 12 short floor screws; divider is unfastened.
5. Open dry sorter only; no airtight, moisture-control or seed-life claim.

D1 / SLOT FROM BOTTOM; 0.23 WIDE

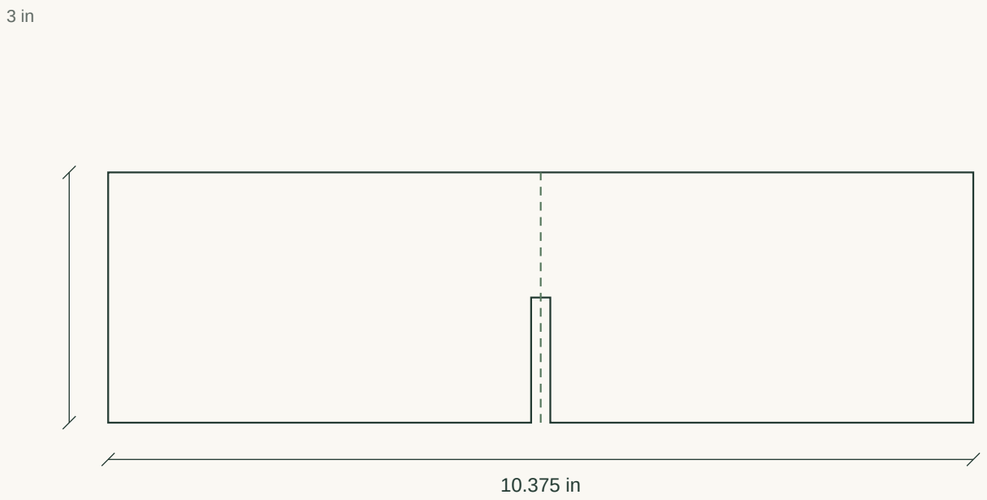

D2 / SLOT FROM TOP; 0.23 WIDE

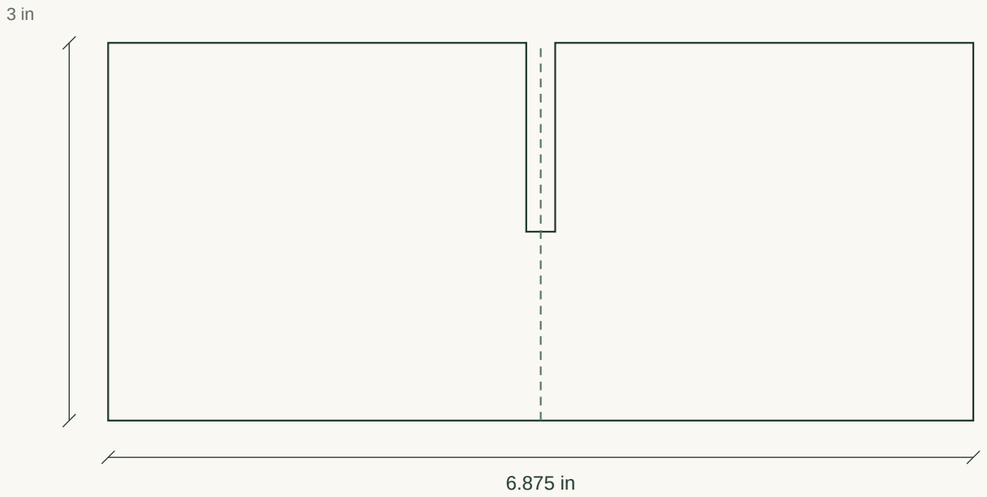


Green dots are screw or center locations, not head-size or strength claims. Consult the exact part datum and pilot instructions in the guide.

GB-087 Seed-packet organizer


03 / ASSEMBLY STUDIES AND INSPECTION | G1 | INCHES | NOT TO SCALE

01

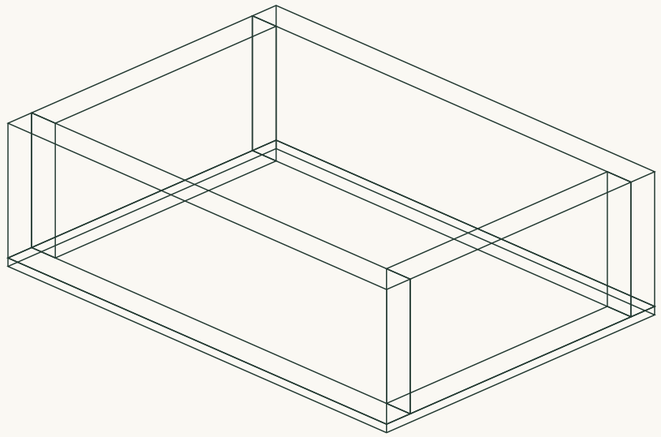


Assemble the wall ring and thin floor

02

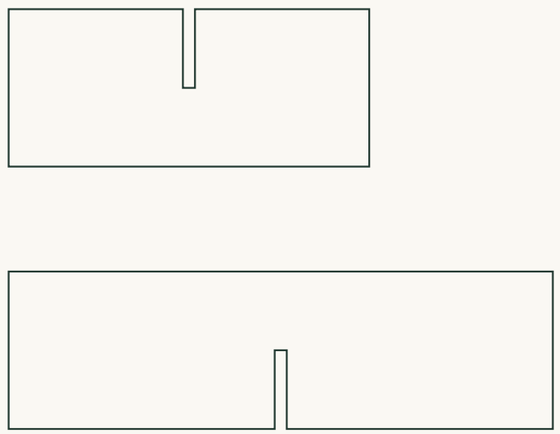

Cut opposing half-depth divider slots

03

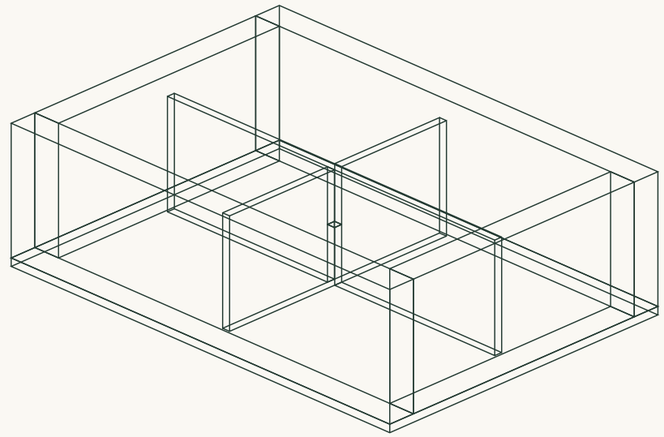

Fit the removable cross and trial real packets

ORIGINAL SCHEMATIC ASSEMBLY VIEWS - NOT REAL-WORK PHOTOGRAPHS

These studies explain part relationships only. They omit clamps, operators and some fasteners; a floating intermediate assembly is not an instruction to work without support. Use the numbered guide steps for safe workholding, pilots, assembly order and stop conditions.

BEFORE THE NEXT STEP

Ends fit between 12-inch long walls; clear opening 10.5 x 7. D1 slot from bottom; D2 slot from top; both 1.5 deep. Slot centers 5.1875 and 3.4375; width 0.23 for measured 0.22 panel. 8 long corner screws and 12 short floor screws; divider is unfastened. Open dry sorter only; no airtight, moisture-control or seed-life claim. Inspect the first actual joint or cut before repeating it. Recheck the drawings before cutting if you change any dimension.

Released without a prototype build: no physical trial, load test or supplier price check has been made.